



THE MATHEMATICAL MODEL FOR A KINEMATIC STRUCTURE TYPE 3T3R – 3T3R

Ioan VUSCAN, Iuliu NEGREAN, Kalman KACSO, Ancuta MIRCEA

Abstract: In this paper are presented the geometric equations for the most and complex structure type 3T3R – 3T3R. The structure is compound from a positioning and orientating structure of the TOOL and the other is afferent of the PIECE. Both structures are in cooperation on a platform commune. Starting from the general cooperating model type 3T3R – 3T3R the equations can be applied for any type of kinematic structure.

Key words: kinematic structures, applied mechanics, cooperation, machine tool, 3T3R structure.

1. INTRODUCTION

The cooperating and general structure type 3T3R–3T3R is compound from a positioning and orientating structure of the TOOL and the other is positioning and orientating structure of the PIECE, both having simultaneous six degrees of freedom (fig. 1). Also, this complex kinematic structure type 3T3R–3T3R can be assigned with two robots which are in a commune platform.

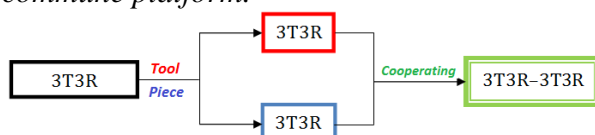


Fig. 1. The cooperation of the positioning and orientating structure of the TOOL and of the PIECE

1.1 The direct geometry model

To achieve the equations of the cooperating general model of structure type 3T3R–3T3R are facilitated by the fact, for both structures, of the TOOL and the PIECE was determinate independently the direct and inverse geometry equations.

Having for both structures the equations, it can be determinate the direct geometry equations for the structures type 3T3R–3T3R. For that, are necessary the equations of the last

system of the positioning and orientating structure of the TOOL and of the PIECE.

In the action of cooperating of both structures, it follows that, the workpiece, represented by system $O_p x_p y_p z_p \equiv \{P\}$ symbolized according to figure 2, to be machined by the tool represented by system $O_s x_s y_s z_s \equiv \{S\}$ after a certain technological process. By a series of homogeny transformations, as follows, the cooperating tool-piece noted with T_{SP} can be expressed with relation:

$$T_{SP} = (T_{PO})^{-1} \cdot T_{S0} \quad (1)$$

where

T_{SP} – represent the system of the tool $O_s x_s y_s z_s \equiv \{S\}$ in rapport with the system of the piece, $O_p x_p y_p z_p \equiv \{P\}$;

$(T_{PO})^{-1}$ – represent the transposed matrix of the system of the piece $O_p x_p y_p z_p \equiv \{P\}$ in rapport with the fixed system $O_0 x_0 y_0 z_0 \equiv \{0\}$;

T_{S0} – represent the system of the tool $O_s x_s y_s z_s \equiv \{S\}$ in rapport with the fixed system $O_0 x_0 y_0 z_0 \equiv \{0\}$.

The cooperation of the tool and of the piece can be expressed by the next relation:

$$T_{SP} = \begin{pmatrix} T_{SP00} & T_{SP01} & T_{SP02} & T_{SP03} \\ T_{SP10} & T_{SP11} & T_{SP12} & T_{SP13} \\ T_{SP20} & T_{SP21} & T_{SP22} & T_{SP23} \\ T_{SP30} & T_{SP31} & T_{SP32} & T_{SP33} \end{pmatrix} \quad (2)$$

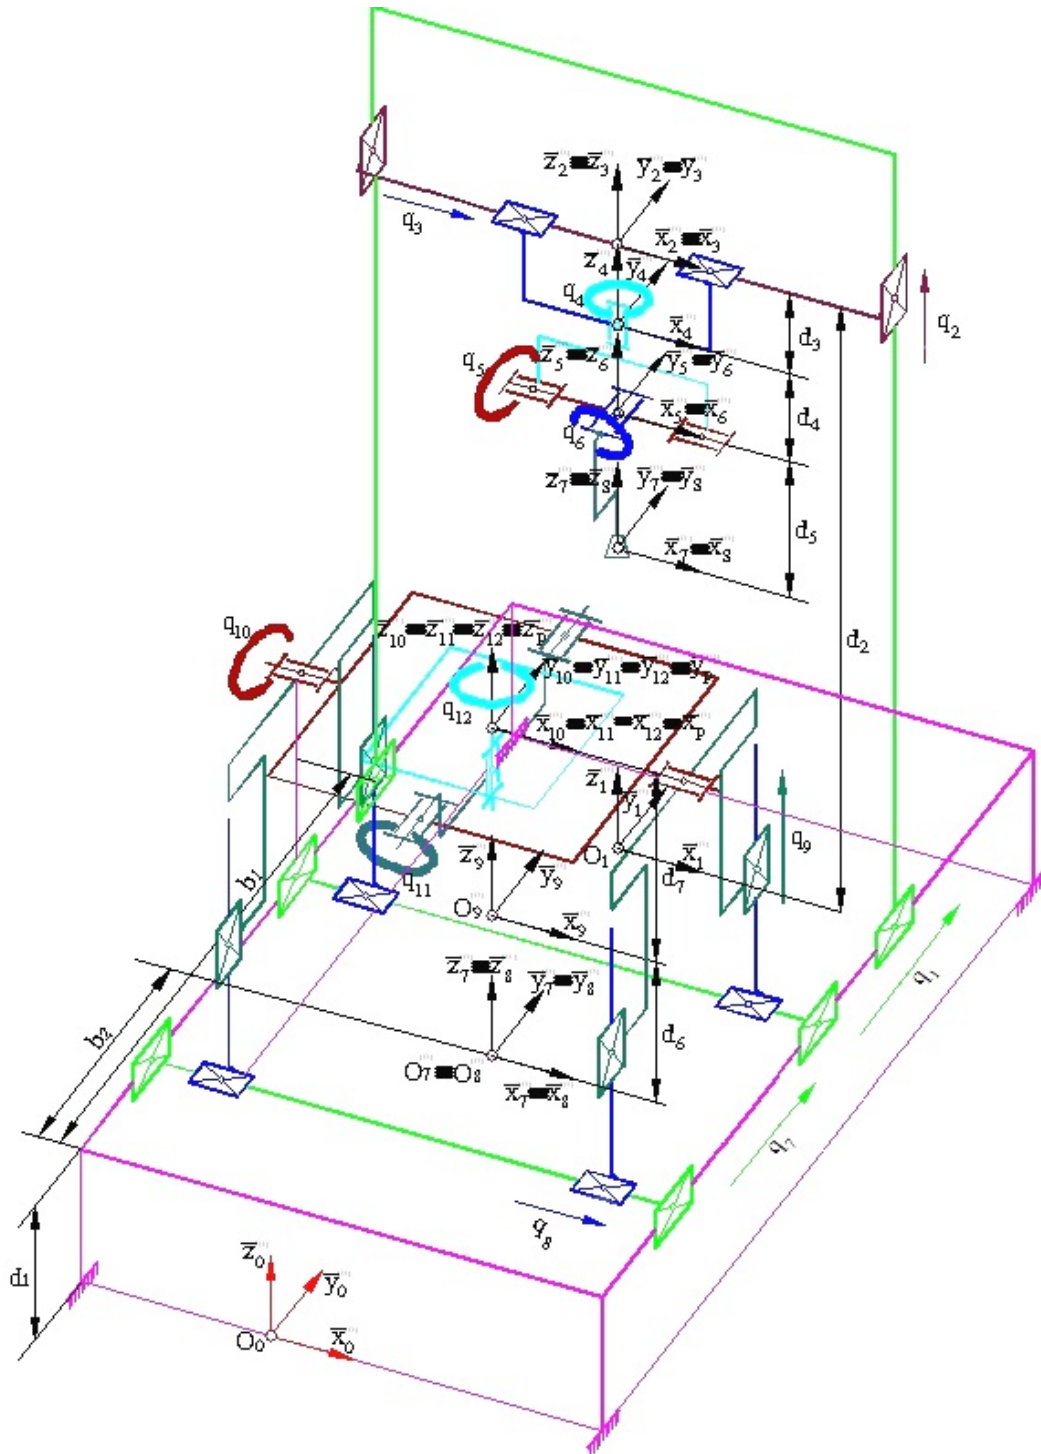


Fig. 2. The kinematical structure type 3T3R – 3T3R in the zero configuration

The components of the equation (2) are obtained with the aid of orientating matrix R_{SP} which express the orientating of the tool

system $\{S\}$ from system $\{P\}$. In this way it is use the relation: $R_{SP} = R({}^P\alpha_{zS}; {}^P\beta_{xS}; {}^P\gamma_{yS})$:

$$R_{SP} \equiv R({}^P\alpha_{zS}; {}^P\beta_{xS}; {}^P\gamma_{yS}) = \begin{bmatrix} -s\alpha_{zS} \cdot s\beta_{xS} \cdot s\gamma_{yS} + c\alpha_{zS} \cdot c\gamma_{zS} & -s\alpha_{zS} \cdot c\beta_{xS} & s\alpha_{zS} \cdot s\beta_{xS} \cdot c\gamma_{yS} + c\alpha_{zS} \cdot s\gamma_{yS} \\ c\alpha_{zS} \cdot s\beta_{xS} \cdot s\gamma_{yS} + s\alpha_{zS} \cdot c\gamma_{zS} & c\alpha_{zS} \cdot c\beta_{xS} & -c\alpha_{zS} \cdot s\beta_{xS} \cdot c\gamma_{yS} + s\alpha_{zS} \cdot c\gamma_{yS} \\ -c\beta_{xS} \cdot s\gamma_{yS} & s\beta_{xS} & c\beta_{xS} \cdot c\gamma_{yS} \end{bmatrix} \quad (3)$$

From relation (5) result the column vector of the positioning and orientating parameters,

$${}^P\bar{X}_{SP} = \begin{pmatrix} {}^P\bar{p}_{SP} \\ \dots \\ {}^P\bar{\psi}_{SP} \end{pmatrix} = \begin{bmatrix} ({}^P P_{zSP} \quad {}^P P_{xSP} \quad {}^P P_{ySP})^S \\ \dots \\ ({}^P \alpha_{zSP} \quad {}^P \beta_{xSP} \quad {}^P \gamma_{ySP})^S \end{bmatrix}. \quad (4)$$

define with the next calculus expression:

Having all parameters, the positioning vectors ${}^P\bar{p}_{SP}$ can be written as:

$${}^P p_{zSP} = \left\{ \begin{array}{l} b_1 \cdot c(q_{10}) \cdot s(q_{12}) - b_2 \cdot c(q_{10}) \cdot s(q_{12}) + d_2 \cdot s(q_{10}) \cdot s(q_{12}) - d_3 \cdot s(q_{10}) \cdot s(q_{12}) - \\ -d_4 \cdot s(q_{10}) \cdot s(q_{12}) - d_6 \cdot s(q_{10}) \cdot s(q_{12}) - d_7 \cdot s(q_{10}) \cdot s(q_{12}) + c(q_{11}) \cdot c(q_{12}) \cdot q_3 - \\ -c(q_{11}) \cdot c(q_{12}) \cdot q_8 + c(q_{10}) \cdot s(q_{12}) \cdot q_1 - c(q_{10}) \cdot s(q_{12}) \cdot q_7 + s(q_{10}) \cdot s(q_{12}) \cdot q_2 - \\ -s(q_{10}) \cdot s(q_{12}) \cdot q_9 - d_2 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) + d_3 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) + \\ +d_4 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) + d_6 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) + d_7 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) - \\ -c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) \cdot q_2 + c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) \cdot q_9 + c(q_{12}) \cdot s(q_{10}) \cdot s(q_{11}) \cdot q_1 - \\ -c(q_{12}) \cdot s(q_{10}) \cdot s(q_{11}) \cdot q_7 + b_1 \cdot c(q_{12}) \cdot s(q_{10}) \cdot s(q_{11}) - b_2 \cdot c(q_{12}) \cdot s(q_{10}) \cdot s(q_{11}) - \\ -d_5 \cdot c(q_4) \cdot c(q_{11}) \cdot c(q_{12}) \cdot s(q_6) - d_5 \cdot c(q_5) \cdot c(q_6) \cdot c(q_{10}) \cdot s(q_{12}) - \\ -d_5 \cdot c(q_{10}) \cdot s(q_4) \cdot s(q_6) \cdot s(q_{12}) - d_5 \cdot c(q_5) \cdot c(q_6) \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_{11}) - \\ -d_5 \cdot c(q_4) \cdot c(q_6) \cdot c(q_{10}) \cdot s(q_5) \cdot s(q_{12}) + d_5 \cdot c(q_6) \cdot c(q_{11}) \cdot c(q_{12}) \cdot s(q_4) \cdot s(q_5) - \\ -d_5 \cdot c(q_{12}) \cdot s(q_4) \cdot s(q_6) \cdot s(q_{10}) \cdot s(q_{11}) + d_5 \cdot c(q_4) \cdot c(q_6) \cdot c(q_{12}) \cdot s(q_5) \cdot s(q_{11}) \end{array} \right\} \quad (5)$$

$${}^P\bar{p}_{xSP} = \left\{ \begin{array}{l} b_1 \cdot c(q_{10}) \cdot c(q_{12}) - b_2 \cdot c(q_{10}) \cdot c(q_{12}) + d_2 \cdot c(q_{12}) \cdot s(q_{10}) - \\ -d_3 \cdot c(q_{12}) \cdot s(q_{10}) - d_4 \cdot c(q_{12}) \cdot s(q_{10}) - d_6 \cdot c(q_{12}) \cdot s(q_{10}) - \\ -d_7 \cdot c(q_{12}) \cdot s(q_{10}) + c(q_{10}) \cdot c(q_{12}) \cdot q_1 - c(q_{10}) \cdot c(q_{12}) \cdot q_7 + \\ +c(q_{10}) \cdot c(q_{12}) \cdot q_2 - c(q_{11}) \cdot s(q_{12}) \cdot q_3 + c(q_{11}) \cdot s(q_{12}) \cdot q_8 - \\ -c(q_{12}) \cdot s(q_{10}) \cdot q_9 + d_2 \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) - \\ -d_3 \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) + d_4 \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) - d_6 \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) - \\ -d_7 \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) + c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) \cdot q_2 - c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) \cdot q_9 - \\ -s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) \cdot q_1 + s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) \cdot q_7 - b_1 \cdot s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) + \\ +b_2 \cdot s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) - d_5 \cdot c(q_5) \cdot c(q_6) \cdot c(q_{12}) \cdot s(q_{10}) - \\ -d_5 \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_4) \cdot s(q_6) + d_5 \cdot c(q_4) \cdot c(q_{11}) \cdot s(q_6) \cdot s(q_{12}) - \\ -d_5 \cdot c(q_4) \cdot c(q_6) \cdot c(q_{10}) \cdot c(q_{12}) \cdot s(q_5) - d_5 \cdot c(q_5) \cdot c(q_6) \cdot c(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) + \\ +d_5 \cdot c(q_6) \cdot c(q_{11}) \cdot s(q_4) \cdot s(q_5) \cdot s(q_{12}) + d_5 \cdot s(q_4) \cdot s(q_6) \cdot s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) - \\ +d_5 \cdot c(q_4) \cdot c(q_6) \cdot s(q_5) \cdot s(q_{10}) \cdot s(q_{11}) \cdot s(q_{12}) \end{array} \right\} \quad (6)$$

$${}^P P_{ySP} = \left\{ \begin{array}{l} s(q_{11}) \cdot q_3 - s(q_{11}) \cdot q_8 - b_1 \cdot c(q_{11}) \cdot s(q_{10}) + b_2 \cdot c(q_{11}) \cdot s(q_{10}) + \\ +d_2 \cdot c(q_{10}) \cdot c(q_{11}) - d_3 \cdot c(q_{10}) \cdot c(q_{11}) - d_4 \cdot c(q_{10}) \cdot c(q_{11}) - d_6 \cdot c(q_{10}) \cdot c(q_{11}) - \\ -d_7 \cdot c(q_{10}) \cdot c(q_{11}) + c(q_{10}) \cdot c(q_{11}) \cdot q_2 - c(q_{10}) \cdot c(q_{11}) \cdot q_9 - c(q_{11}) \cdot s(q_{10}) \cdot q_1 + \\ +c(q_{11}) \cdot s(q_{10}) \cdot q_7 - d_5 \cdot c(q_4) \cdot s(q_6) \cdot s(q_{11}) - d_5 \cdot c(q_5) \cdot c(q_6) \cdot c(q_{10}) \cdot c(q_{11}) - \\ -d_5 \cdot c(q_6) \cdot s(q_4) \cdot s(q_5) \cdot s(q_{11}) + d_5 \cdot c(q_{11}) \cdot s(q_4) \cdot s(q_6) \cdot s(q_{10}) - \\ -d_5 \cdot c(q_4) \cdot c(q_6) \cdot c(q_{11}) \cdot s(q_5) \cdot s(q_{10}) \end{array} \right\} \quad (7)$$

1.2 The inverse geometry model

The input data required in this case are the position and the orientation of the PIECE in rapport with the system of the tool. Are wrote a series of equations between the systems $\{0\} \rightarrow \{S\} \rightarrow \{P\}$, system noted with T_{SP} , and namely:

$$T_{SP} = \begin{bmatrix} R_{SP} & P_{SP}^{-(0)} \\ 0 & I \end{bmatrix} = \begin{bmatrix} {}^S\alpha_{Px} & {}^S\beta_{Px} & {}^S\gamma_{Px} & {}^P P_{xSP} \\ {}^S\alpha_{Py} & {}^S\beta_{Py} & {}^S\gamma_{Py} & {}^P P_{ySP} \\ {}^S\alpha_{Pz} & {}^S\beta_{Pz} & {}^S\gamma_{Pz} & {}^P P_{zSP} \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (8)$$

The positioning vectors $P_{SP}^{-(0)}$ are explained with the relation:

$$P_{SP}^{-(0)} = \begin{pmatrix} P_{xSP} \\ \dots \\ P_{ySP} \\ \dots \\ P_{zSP} \end{pmatrix} = \begin{pmatrix} -p_{xP} \cdot \cos(\alpha_{Px}) + (b_1 - p_{yP}) \cdot \cos(\beta_{Px}) + (d_1 + d_2 - d_3 - d_4 - d_5 - p_{zP}) \cdot \cos(\gamma_{Px}) \\ \dots \\ -p_{xP} \cdot \cos(\alpha_{Py}) + (b_1 - p_{yP}) \cdot \cos(\beta_{Py}) + (d_1 + d_2 - d_3 - d_4 - d_5 - p_{zP}) \cdot \cos(\gamma_{Py}) \\ \dots \\ -p_{xP} \cdot \cos(\alpha_{Pz}) + (b_1 - p_{yP}) \cdot \cos(\beta_{Pz}) + (d_1 + d_2 - d_3 - d_4 - d_5 - p_{zP}) \cdot \cos(\gamma_{Pz}) \end{pmatrix} \quad (9)$$

The coordinates for positioning are:

$$\begin{cases} T_{SP_03} = {}^P P_{xSP} \rightarrow \mathbf{q}_j; \\ T_{SP_13} = {}^P P_{ySP} \rightarrow \mathbf{q}_{j+1}; \\ T_{SP_23} = {}^P P_{zSP} \rightarrow \mathbf{q}_{j+2}. \end{cases} \quad (10)$$

The coordinates for orientating are:

$$\begin{cases} T_{SP_{21}} = \sin {}^P \beta_{xS} \rightarrow \mathbf{q}_i; \\ T_{SP_{20}} = -\cos {}^P \beta_{xS} \cdot \sin {}^P \gamma_{yS} \rightarrow \mathbf{q}_{i+1}; \\ T_{PS_{22}} = \cos {}^P \beta_{xS} \cdot \cos {}^P \gamma_{yS} \end{cases}$$

Modelul matematic pentru o structură cinematică de tipul 3T3R – 3T3R

Rezumat: În această lucrare sunt prezentate ecuațiile geometriei directe și inverse pentru cea mai complexă structură de tip 3T3R – 3T3R. Aceasta este compusă din o structură de poziționare și orientare a SCULEI, cealaltă fiind corespondenta PIESEI. Ambele structuri sunt în cooperare pe o platform comună. Pornind de la acest model general de cooperare de tip 3T3R – 3T3R ecuațiile geometriei directe și inverse pot fi aplicate pentru oricare tip de structură cinematică.

Ioan Vuscan, Prof. Dr. Eng., Technical University of Cluj-Napoca, Manufacturing Engineering Department, Gheorghe.Vuscan@tcm.utcluj.ro, str. Aviator Badescu, no. 24A, Cluj-Napoca.

Iuliu Negrean, Prof. Dr. Eng., Head of Department of Mechanical Systems Engineering, iuliu.negrean@mep.utcluj.ro, Office Phone 0264/401616.

Kalman Kacso, Assistant, Technical University of Cluj-Napoca, Mechanical Systems Engineering Department kacsokalman@gmail.com, Office Phone 0264/401616.

Ancuta Mircea, Dr. Eng., SC Alphametals, aecrimancuta@yahoo.com, Cluj-Napoca, 0748/362266.

$$\begin{cases} T_{SP_{01}} = -\sin {}^P \alpha_{zS} \cdot \cos {}^P \beta_{xS} \rightarrow \mathbf{q}_{i+2}. \\ T_{SP_{11}} = \cos {}^P \alpha_{zS} \cdot \cos {}^P \beta_{xS} \end{cases} \quad (11)$$

Having the final results of the positioning and orientating coordinates relations (10) and (11) in the case of the tool-piece cooperating, these through particularization can be applied to any type of kinematic structure (see particularization of 1T-2T structure).

2. CONCLUSIONS

Mathematical modeling of the structure type 3T3R–3T3R represents an important realization, because starting from this it can be determinate the generalized coordinates for any type of kinematic structure and also to particularize any type of machine tool structure. Also open new research directions about the modeling and simulation of machine tools by applying on that of locating matrix, usually applying on robots.

3. SELECTIVE REFERENCES

[1] Negrean, I., Vuscan, I., Haiduc, N. (1998), *Robotics: Kinematic and Dynamic Modeling*, Didactical and Pedagogical Publishing House, Bucharest, Romania;

[2] Negrean, I., Duca, A., Negrean, D.C., Kacso, K. (2008), *Advanced mechanics in robotics*, UT Press, Cluj-Napoca, Romania;

[3] Mircea, A., (2011), *Contributions regarding the modelling and simulation of kinematics structures of machining centers and compensation of positioning and orientation errors of the workpieces – PhD Thesis*, Technical University of Cluj-Napoca, 2011, Cluj-Napoca, Romania.